



- ✧ Up to 80km on 9/125μm SMF
- ✧ DWDM 100GHz ITU Grid C Band Available
- ✧ DWDM DFB laser transmitter
- ✧ Single +3.3V Power Supply
- ✧ Monitoring Interface Compliant with SFF-8472
- ✧ Low power dissipation <1W typically
- ✧ Operating temperature range: 0°C to 70°C
- ✧ RoHS compliant and Lead Free

Features:

- ✧ Up to 1.25Gb/s Data Links
- ✧ Hot-Pluggable
- ✧ Duplex LC connector

Applications:

- ✧ Gigabit Ethernet
- ✧ 1×Fiber Channel
- ✧ DWDM Networks

Description:

OPWAY's OP3480D-DXX Small Form Factor Pluggable (SFP) transceivers are compatible with the Small Form Factor Pluggable Multi-Sourcing Agreement (MSA) and SFF-8472. The transceiver consists of two sections: The transmitter section incorporates a cooled DWDM DFB laser, And the receiver section consists of a PIN photodiode integrated with a TIA. The module data link up to 80km in 9/125um single mode fiber. It offers a simple and convenient way to interface PCBs to single mode fiber optic cables in Dense Wavelength Division Multiplexing (DWDM) applications. It is a high performance, cost effective module for serial optical data communication applications.

● Absolute Maximum Ratings

| Parameter | Symbol | Min. | Typical | Max. | Unit |
|---------------------|-----------------|------|---------|------|------|
| Storage Temperature | T _s | -40 | | +85 | °C |
| Supply Voltage | V _{CC} | -0.5 | | 4 | V |
| Relative Humidity | RH | 0 | | 85 | % |

● Recommended Operating Environment:

| Parameter | Symbol | Min. | Typical | Max. | Unit |
|----------------------------|--------------------|-------|---------|---------------------|------|
| Case operating Temperature | T _c | 0 | | +70 | °C |
| Supply Voltage | V _{CC} | 3.135 | | 3.465 | V |
| Supply Current | I _{cc} | | | 300 | mA |
| Inrush Current | I _{surge} | | | I _{cc} +30 | mA |
| Maximum Power | P _{max} | | | 1 | W |

● **Electrical Characteristics (T_{OP} = T_c, VCC = 3.135 to 3.465 Volts)**

| Parameter | Symbol | Min. | Typical | Max. | Unit | Note |
|--------------------------------|-----------------------|-----------------------|---------|-----------------------|-------|------|
| Transmitter Section: | | | | | | |
| Input differential impedance | R _{in} | 90 | 100 | 110 | | |
| Single ended data input swing | V _{in PP} | 250 | | 1200 | mVp-p | |
| Transmit Disable Voltage | V _D | V _{cc} - 1.3 | | V _{cc} | V | 2 |
| Transmit Enable Voltage | V _{EN} | V _{ee} | | V _{ee} + 0.8 | V | |
| Transmit Disable Assert Time | T _{dessert} | | | 10 | us | |
| Receiver Section: | | | | | | |
| Single ended data output swing | V _{out,pp} | 300 | | 800 | mv | 3 |
| Data output rise time | t _r | | | 260 | ps | 4 |
| Data output fall time | t _f | | | 260 | ps | 4 |
| LOS Fault | V _{losfault} | V _{cc} - 0.5 | | V _{CC_host} | V | 5 |
| LOS Normal | V _{los norm} | V _{ee} | | V _{ee} +0.5 | V | 5 |
| Power Supply Rejection | PSR | 100 | | | mVpp | 6 |

Note:

1. AC coupled.
2. Or open circuit.
3. Into 100 ohm differential termination.
4. 20 – 80 %
5. LOS is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
6. All transceiver specifications are compliant with a power supply sinusoidal modulation of 20 Hz to 1.5MHz up to specified value applied through the power supply filtering network shown on page 23 of the Small Form-factor Pluggable (SFP) Transceiver Multi-Source Agreement (MSA), September 14, 2000.

● **Optical Characteristics (T_{OP} = T_c, VCC = 3.135 to 3.465 Volts)**

| Parameter | Symbol | Min. | Typical | Max. | Unit | Note |
|--------------------------------------|---|-------|---------|-------|------|------|
| Transmitter Section: | | | | | | |
| Optical Wavelength-End Of Life | λ | X-100 | X | X+100 | pm | |
| Optical Wavelength-Beginning Of Life | λ | X-25 | X | X+25 | pm | |
| Spectral Width | σ | | | 1 | nm | |
| Side Mode Suppression Ratio | SMSR | 30 | | | dB | |
| Optical Output Power | P _{out} | 0 | | +5 | dBm | 1 |
| Optical Rise/Fall Time | t _r / t _f | | | 260 | ps | 2 |
| Extinction Ratio | ER | 9 | | | dB | |
| Generated Jitter (peak to peak) | J _{TXp-p} | | | 0.07 | UI | 3 |
| Generated Jitter (rms) | J _{TXrms} | | | 0.007 | UI | 3 |
| Eye Mask for Optical Output | Compliant with IEEE802.3z(class 1 laser safety) | | | | | |
| Receiver Section: | | | | | | |
| Optical Input Wavelength | λ _c | 1480 | | 1580 | nm | |
| Receiver Overload | P _{ol} | 0 | | | dBm | 4 |
| RX Sensitivity | Sen | | | -25 | dBm | 4 |
| RX_LOS Assert | LOS _A | -40 | | | dBm | |

Shenzhen Opway Communication Co., Ltd.

| | | | | | | |
|--|------------------|-----|------|-------------------|------|--|
| RX_LOS De-assert | LOS _D | | | -25 | dBm | |
| RX_LOS Hysteresis | LOS _H | 0.5 | | | dB | |
| General Specifications: | | | | | | |
| Data Rate | BR | | 1.25 | | Gb/s | |
| Bit Error Rate | BER | | | 10 ⁻¹² | | |
| Max. Supported Link Length on 9/125μm SMF@1.25Gb/s | L _{MAX} | | 80 | | km | |
| Total System Budget | LB | 24 | | | dB | |

Note

1. The optical power is launched into SMF.
2. 20-80%.
3. Jitter measurements taken using Agilent OMNIBERT 718 in accordance with GR-253.
4. Measured with PRBS 2⁷-1 at 10⁻¹² BER.

Pin Assignment:

Diagram of Host Board Connector Block Pin Numbers and Name

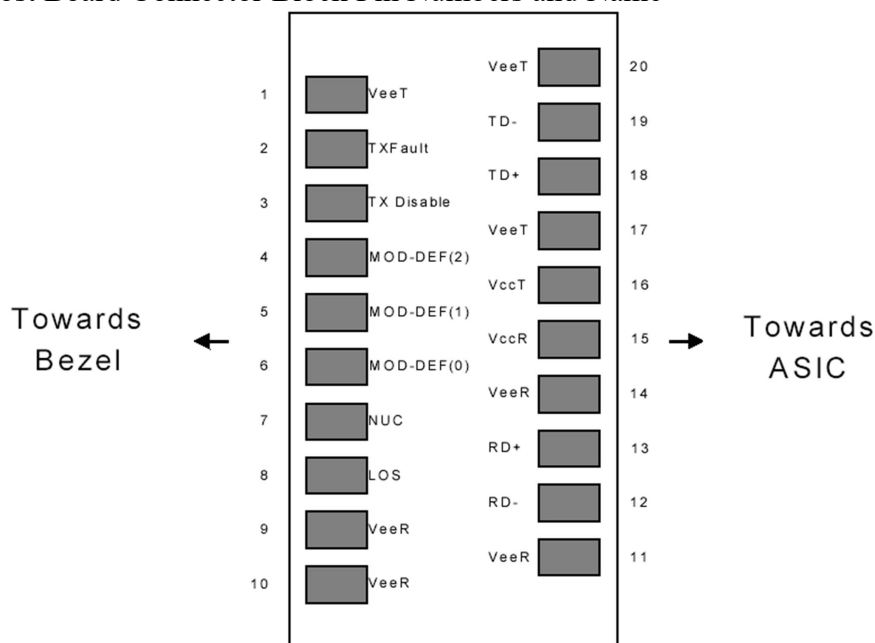


Diagram of Host Board Connector Block Pin Numbers and Names

● **Pin Function Definitions**

| Pin No | Name | Function | Plug Seq | Notes |
|--------|------------------|------------------------------|----------|-------|
| 1 | V _{eeT} | Transmitter Ground | 1 | 1 |
| 2 | TX Fault | Transmitter Fault Indication | 3 | |
| 3 | TX Disable | Transmitter Disable | 3 | 2 |
| 4 | MOD-DEF2 | Module Definition | 2 | 3 |
| 5 | MOD-DEF1 | Module Definition 1 | 3 | 3 |
| 6 | MOD-DEF0 | Module Definition 0 | 3 | 3 |
| 7 | Rate Select | Not Connected | 3 | 4 |
| 8 | LOS | Loss of Signal | 3 | 5 |
| 9 | V _{eeR} | Receiver Ground | 1 | 1 |
| 10 | V _{eeR} | Receiver Ground | 1 | 1 |

| | | | | |
|----|------------------|------------------------|---|---|
| 11 | V _{ccR} | Receiver Ground | | 1 |
| 12 | RD- | Inv. Received Data Out | 3 | 6 |
| 13 | RD+ | Received Data Out | 3 | 6 |
| 14 | V _{ccR} | Receiver Ground | 3 | 1 |
| 15 | V _{ccR} | Receiver Power | 2 | 1 |
| 16 | V _{ccT} | Transmitter Power | 2 | |
| 17 | V _{ccT} | Transmitter Ground | 1 | |
| 18 | TD+ | Transmit Data In | 3 | 6 |
| 19 | TD- | Inv. Transmit In | 3 | 6 |
| 20 | V _{ccT} | Transmitter Ground | 1 | |

Notes:

1. Circuit ground is internally isolated from chassis ground.
2. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
3. Should be pulled up with 4.7k - 10 kohms on host board to a voltage between 2.0V and 3.6V. MOD_DEF(0) pulls line low to indicate module is plugged in.
4. Rate select is not used
5. LOS is open collector output. Should be pulled up with 4.7k – 10 kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
6. AC Coupled

SFP Module EEPROM Information and Management

The SFP modules implement the 2-wire serial communication protocol as defined in the SFP -8472. The serial ID information of the SFP modules and Digital Diagnostic Monitor parameters can be accessed through the I²C interface at address A0h and A2h.

The memory is mapped in Table 1.

Detailed ID information (A0h) is listed in Table 2.

And the DDM specification at address A2h.

For more details of the memory map and byte definitions, please refer to the SFF-8472, “Digital Diagnostic Monitoring Interface for Optical Transceivers”. The DDM parameters have been internally calibrated.

Table 1. Digital Diagnostic Memory Map (Specific Data Field Descriptions)

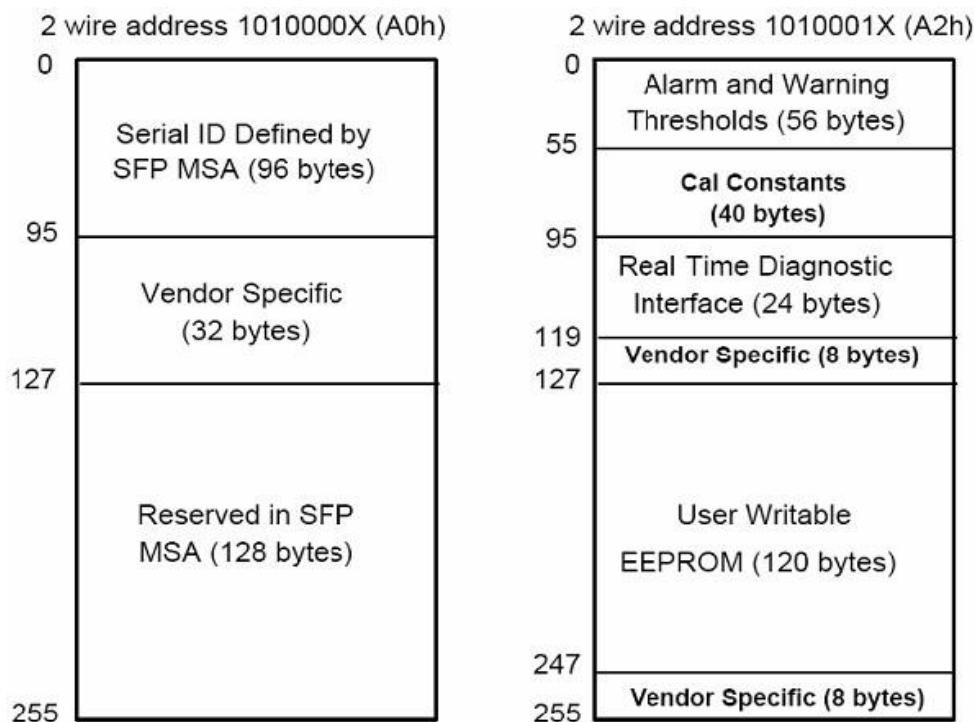


Table 2 - EEPROM Serial ID Memory Contents (A0h)

| Data Address | Length (Byte) | Name of Length | Description and Contents |
|--------------------|---------------|----------------|---|
| Base ID Fields | | | |
| 0 | 1 | Identifier | Type of Serial transceiver (03h=SFP) |
| 1 | 1 | Reserved | Extended identifier of type serial transceiver (04h) |
| 2 | 1 | Connector | Code of optical connector type (07=LC) |
| 3-10 | 8 | Transceiver | |
| 11 | 1 | Encoding | NRZ(03h) |
| 12 | 1 | BR, Nominal | Nominal baud rate, unit of 100Mbps |
| 13-14 | 2 | Reserved | (0000h) |
| 15 | 1 | Length(9um) | Link length supported for 9/125um fiber, units of 100m |
| 16 | 1 | Length(50um) | Link length supported for 50/125um fiber, units of 10m |
| 17 | 1 | Length(62.5um) | Link length supported for 62.5/125um fiber, units of 10m |
| 18 | 1 | Length(Copper) | Link length supported for copper, units of meters |
| 19 | 1 | Reserved | |
| 20-35 | 16 | Vendor Name | SFP vendor name: OPWAY |
| 36 | 1 | Reserved | |
| 37-39 | 3 | Vendor OUI | SFP transceiver vendor OUI ID |
| 40-55 | 16 | Vendor PN | Part Number: "OP3480D-Dxx" (ASCII) |
| 56-59 | 4 | Vendor rev | Revision level for part number |
| 60-62 | 3 | Reserved | |
| 63 | 1 | CCID | Least significant byte of sum of data in address 0-62 |
| Extended ID Fields | | | |
| 64-65 | 2 | Option | Indicates which optical SFP signals are implemented (001Ah = LOS, TX_FAULT, TX_DISABLE all supported) |
| 66 | 1 | BR, max | Upper bit rate margin, units of % |
| 67 | 1 | BR, min | Lower bit rate margin, units of % |

| | | | |
|---------------------------|-----|-----------|--|
| 68-83 | 16 | Vendor SN | Serial number (ASCII) |
| 84-91 | 8 | Date code | OPWAY's Manufacturing date code |
| 92-94 | 3 | Reserved | |
| 95 | 1 | CCEX | Check code for the extended ID Fields (addresses 64 to 94) |
| Vendor Specific ID Fields | | | |
| 96-127 | 32 | Readable | OPWAY specific date, read only |
| 128-255 | 128 | Reserved | Reserved for SFF-8079 |

● Digital Diagnostic Monitor Characteristics


| Data Address | Parameter | Accuracy | Unit |
|--------------|----------------------------------|----------|------|
| 96-97 | Transceiver Internal Temperature | ±3.0 | °C |
| 98-99 | VCC3 Internal Supply Voltage | ±3.0 | % |
| 100-101 | Laser Bias Current | ±10 | % |
| 102-103 | Tx Output Power | ±3.0 | dBm |
| 104-105 | Rx Input Power | ±3.0 | dBm |

Regulatory Compliance

The OP3480D-Dxx complies with international Electromagnetic Compatibility (EMC) and international safety requirements and standards (see details in Table following).


| | | |
|---|--|--|
| Electrostatic Discharge (ESD) to the Electrical Pins | MIL-STD-883E Method 3015.7 | Class 1(>1000 V) |
| Electrostatic Discharge (ESD) to the Duplex LC Receptacle | IEC 61000-4-2 GR-1089-CORE | Compatible with standards |
| Electromagnetic Interference (EMI) | FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B | Compatible with standards |
| Laser Eye Safety | FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2 | Compatible with Class 1 laser product. |

Recommended Circuit:

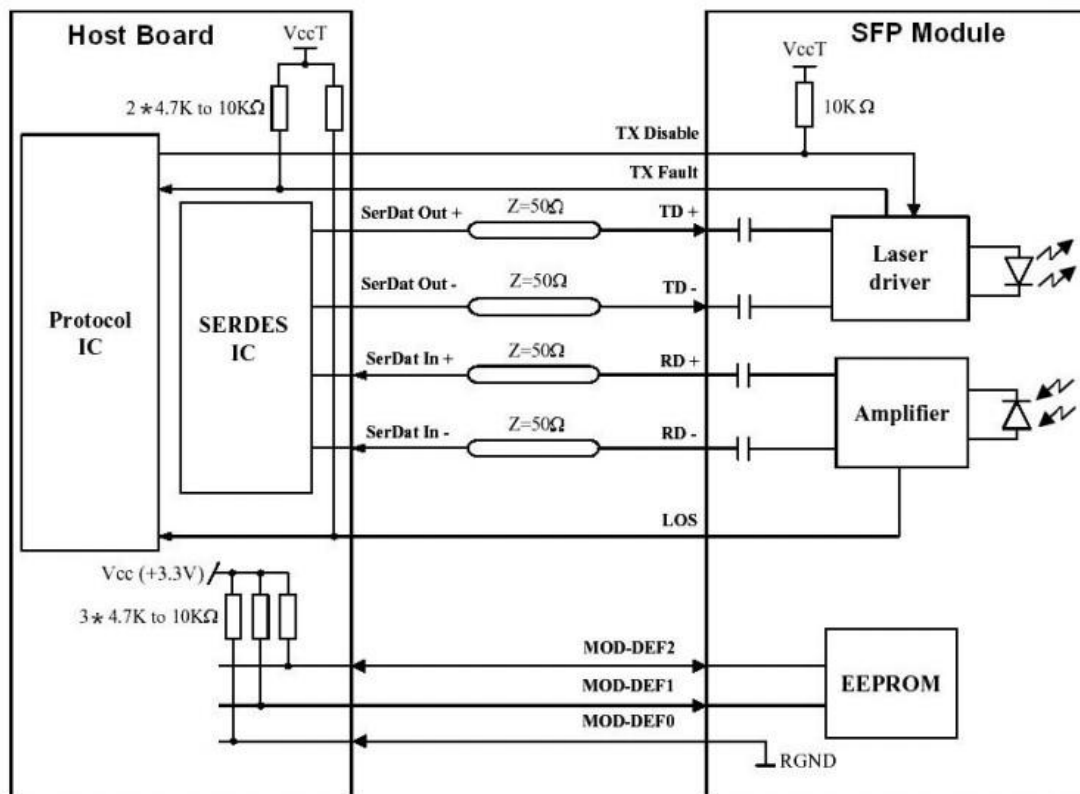

SFP Host Recommended Circuit

Mechanical Dimensions:

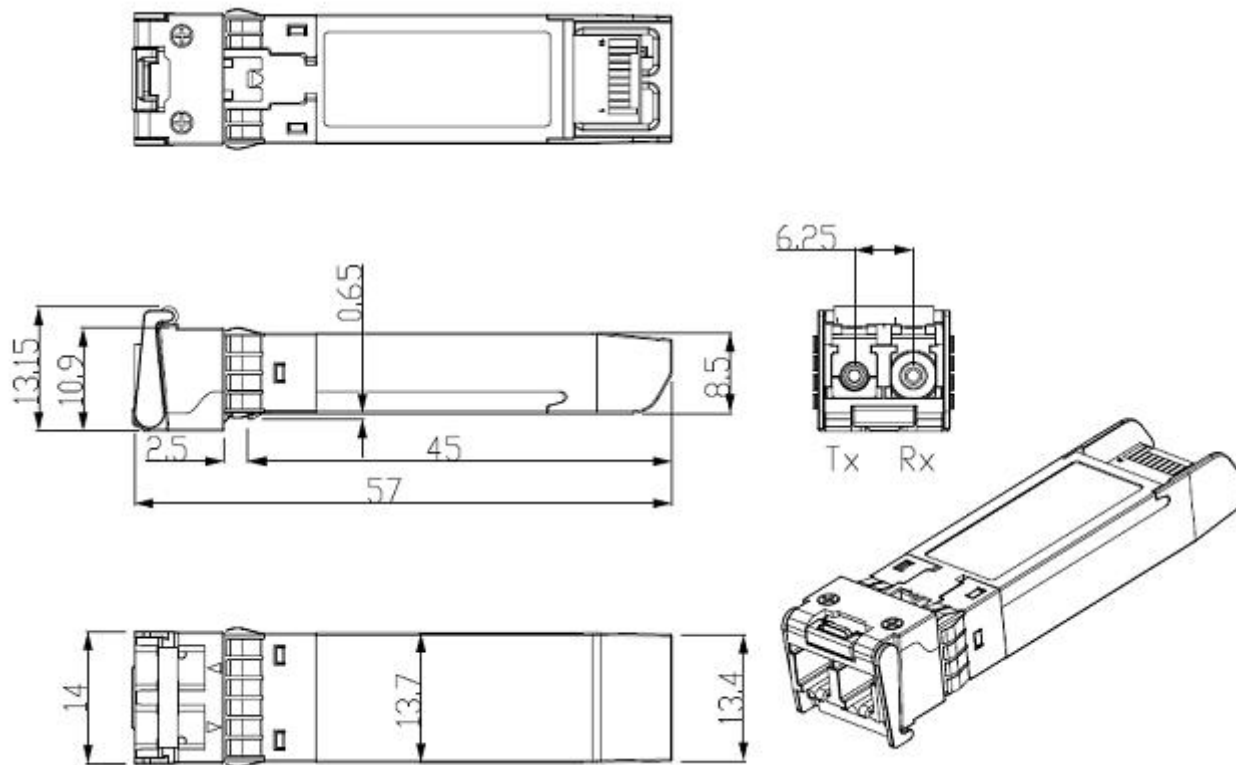

Mechanical Drawing

● **Order Information:**

OP3480D-DXX

XX: 100GHZ ITU Grid Wavelength

| Part No. | Central Wavelength(nm) | Frequency (THZ) |
|-------------|------------------------|-----------------|
| OP3480D-D61 | 1528.77 | 196.1 |
| OP3480D-D60 | 1529.55 | 196.0 |
| OP3480D-D59 | 1530.33 | 195.9 |
| OP3480D-D58 | 1531.12 | 195.8 |
| OP3480D-D57 | 1531.90 | 195.7 |
| OP3480D-D56 | 1532.68 | 195.6 |
| OP3480D-D55 | 1533.47 | 195.5 |
| OP3480D-D54 | 1534.25 | 195.4 |
| OP3480D-D53 | 1535.04 | 195.3 |
| OP3480D-D52 | 1535.82 | 195.2 |
| OP3480D-D51 | 1536.61 | 195.1 |
| OP3480D-D50 | 1537.40 | 195.0 |
| OP3480D-D49 | 1538.19 | 194.9 |
| OP3480D-D48 | 1538.98 | 194.8 |
| OP3480D-D47 | 1539.77 | 194.7 |
| OP3480D-D46 | 1540.56 | 194.6 |
| OP3480D-D45 | 1541.35 | 194.5 |
| OP3480D-D44 | 1542.14 | 194.4 |
| OP3480D-D43 | 1542.94 | 194.3 |
| OP3480D-D42 | 1543.73 | 194.2 |
| OP3480D-D41 | 1544.53 | 194.1 |
| OP3480D-D40 | 1545.32 | 194.0 |
| OP3480D-D39 | 1546.12 | 193.9 |
| OP3480D-D38 | 1546.92 | 193.8 |
| OP3480D-D37 | 1547.72 | 193.7 |
| OP3480D-D36 | 1548.51 | 193.6 |
| OP3480D-D35 | 1549.32 | 193.5 |
| OP3480D-D34 | 1550.12 | 193.4 |
| OP3480D-D33 | 1550.92 | 193.3 |
| OP3480D-D32 | 1551.72 | 193.2 |
| OP3480D-D31 | 1552.52 | 193.1 |
| OP3480D-D30 | 1553.33 | 193.0 |
| OP3480D-D29 | 1554.13 | 192.9 |
| OP3480D-D28 | 1554.94 | 192.8 |
| OP3480D-D27 | 1555.75 | 192.7 |
| OP3480D-D26 | 1556.55 | 192.6 |
| OP3480D-D25 | 1557.36 | 192.5 |
| OP3480D-D24 | 1558.17 | 192.4 |
| OP3480D-D23 | 1558.98 | 192.3 |
| OP3480D-D22 | 1559.79 | 192.2 |
| OP3480D-D21 | 1560.61 | 192.1 |

| | | |
|-------------|---------|-------|
| OP3480D-D20 | 1561.42 | 192.0 |
| OP3480D-D19 | 1562.23 | 191.9 |
| OP3480D-D18 | 1563.05 | 191.8 |
| OP3480D-D17 | 1563.86 | 191.7 |

OPWAY reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information.

Published by Shenzhen OPWAY Communication Co., Ltd.

Copyright © OPWAY

All Rights Reserved