



**Features:**

- ✧ Hot pluggable
- ✧ Up to 2.67Gb/s Data Link
- ✧ 1550nm DFB Laser and APD receiver
- ✧ Build-in Isolator
- ✧ Up to 120km on 9/125um SMF

- ✧ SFP MSA package with duplex LC connector
- ✧ Monitoring Interface Compliant with SFF-8472
- ✧ Low power dissipation <1W typically
- ✧ Very low EMI and excellent ESD protection
- ✧ +3.3V single power supply
- ✧ Operating case temperature: 0~+70°C

**Applications:**

- ✧ SONET/SDH STM 16/OC48/2x FC
- ✧ Metro/Access Networks

**Description:**

OP360CD Transceiver is a high performance, cost effective module which have a Duplex LC optics interface. Standard AC coupled CML for high speed signal and LVTTTL control and monitor signals. The receiver section uses a APD receiver and the transmitter uses 1550 nm DFB laser, up to 29 dB link budge ensure this module which work on 2.5Gb/s 120Km application.

● **Absolute Maximum Ratings**

| Parameter           | Symbol               | Min. | Typical | Max. | Unit |
|---------------------|----------------------|------|---------|------|------|
| Storage Temperature | T <sub>S</sub>       | -40  |         | +85  | °C   |
| Supply Voltage      | V <sub>CC</sub> T, R | -0.5 |         | 4    | V    |
| Relative Humidity   | RH                   | 0    |         | 85   | %    |

● **Recommended Operating Environment:**

| Parameter                  | Symbol               | Min.  | Typical | Max.  | Unit |
|----------------------------|----------------------|-------|---------|-------|------|
| Case operating Temperature | T <sub>C</sub>       | 0     |         | +70   | °C   |
| Supply Voltage             | V <sub>CC</sub> T, R | +3.13 | 3.3     | +3.47 | V    |
| Supply Current             | I <sub>CC</sub>      |       |         | 300   | mA   |
| Power Dissipation          | PD                   |       |         | 1     | W    |

● **Electrical Characteristics (T<sub>OP</sub> = 0 to 70 °C, VCC = 3.135 to 3.465 Volts)**

| Parameter                         | Symbol                | Min.                  | Typical | Max.                  | Unit  | Note |
|-----------------------------------|-----------------------|-----------------------|---------|-----------------------|-------|------|
| Supply Voltage                    | V <sub>cc</sub>       | 3.0                   | 3.30    | 3.60                  | V     |      |
| Supply Current                    | I <sub>cc</sub>       |                       | 160     | 300                   | mA    |      |
| Inrush Current                    | I <sub>surge</sub>    |                       |         | I <sub>cc</sub> +30   | mA    |      |
| Maximum Power                     | P <sub>max</sub>      |                       |         | 1                     | W     |      |
| <b>Transmitter Section:</b>       |                       |                       |         |                       |       |      |
| Input differential impedance      | R <sub>in</sub>       | 90                    | 100     | 110                   |       |      |
| Single ended data input swing     | V <sub>in PP</sub>    | 200                   |         | 1200                  | mVp-p |      |
| Transmit Disable Voltage          | V <sub>D</sub>        | V <sub>cc</sub> – 1.3 |         | V <sub>cc</sub>       | V     | 2    |
| Transmit Enable Voltage           | V <sub>EN</sub>       | V <sub>ee</sub>       |         | V <sub>ee</sub> + 0.8 | V     |      |
| Transmit Disable Assert Time      | T <sub>dessert</sub>  |                       |         | 10                    | us    |      |
| <b>Receiver Section:</b>          |                       |                       |         |                       |       |      |
| Single ended data output swing    | V <sub>out,pp</sub>   | 300                   |         | 1000                  | mv    | 3    |
| Data output rise time             | t <sub>r</sub>        |                       |         | 150                   | ps    | 4    |
| Data output fall time             | t <sub>f</sub>        |                       |         | 150                   | ps    | 4    |
| LOS Fault                         | V <sub>losfault</sub> | V <sub>cc</sub> – 0.5 |         | V <sub>CC_host</sub>  | V     | 5    |
| LOS Normal                        | V <sub>los norm</sub> | V <sub>ee</sub>       |         | V <sub>ee</sub> +0.5  | V     | 5    |
| Power Supply Rejection            | PSR                   | 100                   |         |                       | mVpp  | 6    |
| Deterministic Jitter Contribution | RXΔDJ                 |                       |         | 51.7                  | ps    | 7    |
| Total Jitter Contribution         | RXΔTJ                 |                       |         | 122.4                 | ps    |      |

Note:

1. AC coupled.
2. Or open circuit.
3. Into 100 ohm differential termination.
4. 20 – 80 %
5. LOS is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
6. All transceiver specifications are compliant with a power supply sinusoidal modulation of 20 Hz to 1.5MHz up to specified value applied through the power supply filtering network shown on page 23 of the Small Form-factor Pluggable (SFP) Transceiver Multi-Source Agreement (MSA), September 14, 2000.
7. Measured with DJ-free data input signal. In actual application, output DJ will be the sum of input DJ and DJ.

● **Optical Characteristics (TOP = 0 to 70°C, VCC = 3.135 to 3.465 Volts)**

| Parameter                        | Symbol                          | Min. | Typical | Max. | Unit | Note |
|----------------------------------|---------------------------------|------|---------|------|------|------|
| <b>Transmitter Section:</b>      |                                 |      |         |      |      |      |
| Output Center Wavelength(0~70°C) | λ <sub>c</sub>                  | 1530 | 1550    | 1570 | nm   | 1    |
| Spectral Width(-20dB)            | σ                               |      |         | 1    | nm   |      |
| Optical Output Power             | P <sub>out</sub>                | -1   |         | +5   | dBm  | 2    |
| Optical Rise/Fall Time           | t <sub>r</sub> / t <sub>f</sub> |      |         | 150  | ps   | 3    |
| Extinction Ratio                 | ER                              | 8.2  |         |      | dB   |      |

|   |  |      |     |                   |      |     |
|---|--|------|-----|-------------------|------|-----|
| Deterministic Jitter Contribution                       | TX $\Delta$ DJ   |      |     | 56.5              | ps   | 4   |
| Total Jitter Contribution                               | TX $\Delta$ TJ   |      |     | 119               | ps   |     |
| Eye Mask for Optical Output                             | Compliant with Eye Mask Defined in ITU-T G.957standard |      |     |                   |      |     |
| <b>Receiver Section:</b>                                |  |      |     |                   |      |     |
| Optical Input Wavelength                                | $\lambda_c$  | 1100 |     | 1670              | nm   |     |
| Receiver Reflectance                                    |  | 25   |     |                   | dB   |     |
| Receiver Overload                                       | P <sub>ol</sub>  | -7   |     |                   | dBm  | 5.6 |
| RX Sensitivity  | Sen  |      |     | -31               | dBm  | 5.6 |
| RX_LOS Assert   | LOS <sub>A</sub>                                       | -40  |     |                   | dBm  |     |
| RX_LOS De-assert  | LOS <sub>D</sub>                                       |      |     | -32               | dBm  |     |
| RX_LOS Hysteresis                                       | LOS <sub>H</sub>                                       | 0.5  |     | 2.5               | dB   |     |
| <b>General Specifications</b>                           |  |      |     |                   |      |     |
| Data Rate   | BR   |      | 2.5 |                   | Gb/s |     |
| Bit Error Rate  | BER  |      |     | 10 <sup>-12</sup> |      |     |
| Max. Supported Link Length on 9/125 $\mu$ m SMF@2.5Gb/s | L <sub>MAX</sub>                                       |      | 120 |                   | km   | 7   |
| Total System Budget                                     | LB   | 29   |     |                   | dB   | 8   |

Note

1. Also specified to meet curves in FC-PI 13.0 Figures 18 and 19, which allow trade-off between wavelength spectral width.
2. Class 1 Laser Safety per FDA/CDRH and EN (IEC) 60825 regulations.
3. Unfiltered, 20-80%. Complies with ITU-T G.957 eye masks when filtered.
4. Measured with DJ-free data input signal. In actual application, output DJ will be the sum of input DJ and DJ.
5. Measured with conformance signals defined in FC-PI 13.0 specifications.
6. Measured with PRBS 2<sup>7-1</sup> at 10<sup>-12</sup> BER
7. Dispersion limited per FC-PI Rev. 13
8. Attenuation of 0.25 dB/km is used for the link length calculations. Distances are indicative only.

**Pin Assignment:**

Diagram of Host Board Connector Block Pin Numbers and Name

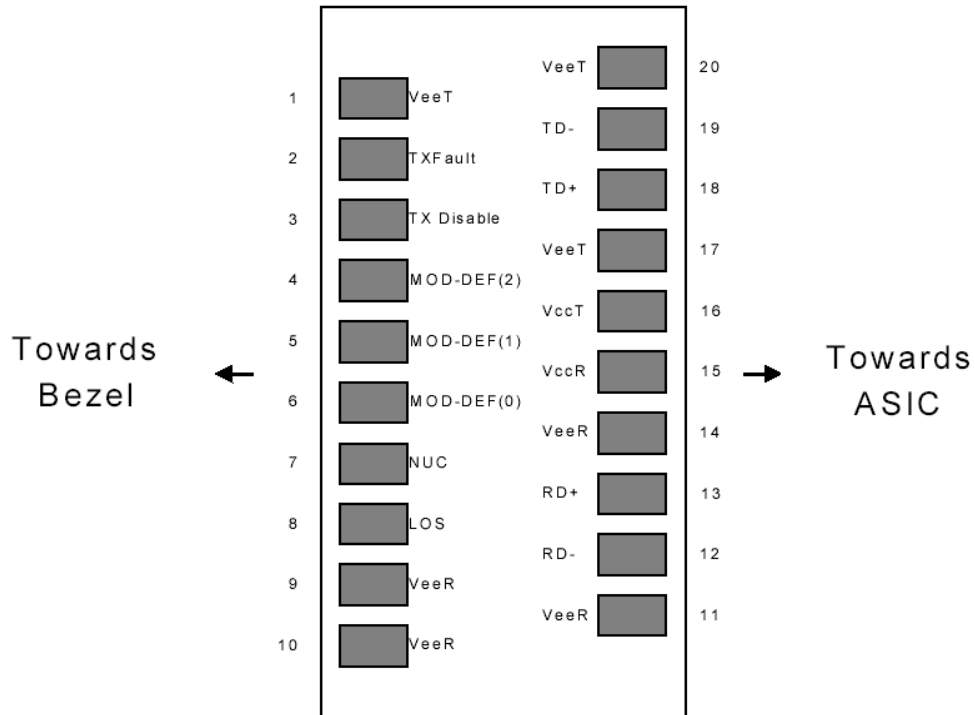


Diagram of Host Board Connector Block Pin Numbers and Names

## ● Pin Function Definitions

| Pin No | Name        | Function                     | Plug Seq | Notes |
|--------|-------------|------------------------------|----------|-------|
| 1      | VeeT        | Transmitter Ground           | 1        | 1     |
| 2      | TX Fault    | Transmitter Fault Indication | 3        |       |
| 3      | TX Disable  | Transmitter Disable          | 3        | 2     |
| 4      | MOD-DEF2    | Module Definition            | 2        | 3     |
| 5      | MOD-DEF1    | Module Definition 1          | 3        | 3     |
| 6      | MOD-DEF0    | Module Definition 0          | 3        | 3     |
| 7      | Rate Select | Not Connected                | 3        | 4     |
| 8      | LOS         | Loss of Signal               | 3        | 5     |
| 9      | VeeR        | Receiver Ground              | 1        | 1     |
| 10     | VeeR        | Receiver Ground              | 1        | 1     |
| 11     | VeeR        | Receiver Ground              |          | 1     |
| 12     | RD-         | Inv. Received Data Out       | 3        | 6     |
| 13     | RD+         | Received Data Out            | 3        | 6     |
| 14     | VeeR        | Receiver Ground              | 3        | 1     |
| 15     | VccR        | Receiver Power               | 2        | 1     |
| 16     | VccT        | Transmitter Power            | 2        |       |
| 17     | VeeT        | Transmitter Ground           | 1        |       |
| 18     | TD+         | Transmit Data In             | 3        | 6     |
| 19     | TD-         | Inv. Transmit In             | 3        | 6     |
| 20     | VeeT        | Transmitter Ground           | 1        |       |

**Notes:**

1. Circuit ground is internally isolated from chassis ground.
2. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
3. Should be pulled up with 4.7k - 10 kohms on host board to a voltage between 2.0V and 3.6V. MOD\_DEF(0) pulls line low to indicate module is plugged in.
4. Rate select is not used
5. LOS is open collector output. Should be pulled up with 4.7k – 10 kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
6. AC Coupled

**Digital Diagnostic Monitor Characteristics**

The following digital diagnostic characteristics are defined over the Recommended Operating Environment unless otherwise specified. It is compliant to SFF8472 Rev10.2 with internal calibration mode. For external calibration mode please contact our sales staff.

| Parameter                             | Symbol    | Min. | Max. | Unit |
|---------------------------------------|-----------|------|------|------|
| Temperature monitor absolute error    | DMI_Temp  | -3   | 3    | degC |
| Laser power monitor absolute error    | DMI_TX    | -3   | 3    | dB   |
| RX power monitor absolute error       | DMI_RX    | -3   | 3    | dB   |
| Supply voltage monitor absolute error | DMI_VCC   | -0.1 | 0.1  | V    |
| Bias current monitor                  | DMI_Ibias | -10% | 10%  | mA   |

● **Serial ID Memory Contents**

| Data Address   | Length (Byte) | Name of Length | Description and Contents                                 |
|----------------|---------------|----------------|--|
| Base ID Fields |               |                |  |
| 0              | 1             | Identifier     | Type of Serial transceiver (03h=SFP)                     |
| 1              | 1             | Reserved       | Extended identifier of type serial transceiver (04h)     |
| 2              | 1             | Connector      | Code of optical connector type (07=LC)                   |
| 3-10           | 8             | Transceiver    | 2.5Gb/s OC48 STM-16                                      |
| 11             | 1             | Encoding       | 8B10B (01h)  |
| 12             | 1             | BR, Nominal    | Nominal baud rate, unit of 100Mbps                       |
| 13             | 1             | Reserved       | (0000h)  |
| 14             | 1             | Length(9um,km) | Link length supported for 9/125um fiber, units of km     |
| 15             | 1             | Length(9um)    | Link length supported for 9/125um fiber, units of 100m   |
| 16             | 1             | Length(50um)   | Link length supported for 50/125um fiber, units of 10m   |
| 17             | 1             | Length(62.5um) | Link length supported for 62.5/125um fiber, units of 10m |
| 18             | 1             | Length(Copper) | Link length supported for copper, units of meters        |
| 19             | 1             | Reserved       |  |
| 20-35          | 16            | Vendor Name    | SFP vendor name:   |
| 36             | 1             | Reserved       |  |
| 37-39          | 3             | Vendor OUI     | SFP transceiver vendor OUI ID                            |


|                           |    |                            |  |
|---------------------------|----|----------------------------|--|
| 40-55                     | 16 | Vendor PN                  | Part Number: "OPxxxx" (ASCII)  |
| 56-59                     | 4  | Vendor rev                 | Revision level for part number   |
| 60-62                     | 3  | Reserved                   |  |
| 63                        | 1  | CCID                       | Least significant byte of sum of data in address 0-62  |
| Extended ID Fields        |    |                            |  |
| 64-65                     | 2  | Option                     | Indicates which optical SFP signals are implemented (001Ah = LOS, TX_FAULT, TX_DISABLE all supported)  |
| 66                        | 1  | BR, max                    | Upper bit rate margin, units of %  |
| 67                        | 1  | BR, min                    | Lower bit rate margin, units of %  |
| 68-83                     | 16 | Vendor SN                  | Serial number (ASCII)  |
| 84-91                     | 8  | Date code                  | Manufacturing date code  |
| 92                        | 1  | Diagnostic Monitoring Type | Digital diagnostic monitoring implemented, "externally calibrated" is implemented, RX measurement type is "Average Power".   |
| 93                        | 1  | Enhanced Options           | Optional Alarm/Warning flags implemented for all monitored quantities, Optional Soft TX_FAULT monitoring implemented, Optional Soft RX_LOS monitoring implemented. |
| 94                        | 1  | SFF_8472 Compliance        | Includes functionality described in Rev9.3 SFF-8472.   |
| 95                        | 1  | CCEX                       | Check code for the extended ID Fields (addresses 64 to 94)   |
| Vendor Specific ID Fields |    |                            |  |
| 96-127                    | 32 | Readable                   | Vendor specific date, read only  |

● **Diagnostics Memory Contents(A2h)**

| Data Address                                | Length (Byte) | Name of Length     | Description and Contents   |
|---|---------------|--------------------|--|
| <b>Diagnostic and control/status fields</b> |               |                    |  |
| 0-39  | 40            | A/W Thresholds     | Diagnostic Flag Alarm and Warning Thresholds                       |
| 40-55                                       | 16            | Unallocated        |  |
| 56-91                                       | 16            | Ext Cal Constants  | Diagnostic calibration constants for optional External Calibration |
| 92-94                                       | 3             | Unallocated        |  |
| 95  | 1             | CC_DMI             | Check code for Base Diagnostic Fields (addresses 0 to 94)          |
| 96-105                                      | 10            | Diagnostics        | Diagnostic Monitor Data (internally or externally calibrated)      |
| 106-109                                     | 4             | Unallocated        |  |
| 110   | 1             | Status/Control     | Optional Status and Control Bits                                   |
| 111   | 1             | Reserved           | Reserved for SFF-8079  |
| 112-113                                     | 2             | Alarm Flags        | Diagnostic Alarm Flag Status Bits                                  |
| 114-115                                     | 2             | Unallocated        |  |
| 116-117                                     | 2             | Warning Flags      | Diagnostic Warning Flag Status Bits                                |
| 118-119                                     | 2             | Ext Status/Control | Extended module control and status bytes                           |


| General use fields |     |                 |                                   |
|--------------------|-----|-----------------|-----------------------------------|
| 120-127            | 8   | Vendor Specific | Vendor specific memory addresses  |
| 128-247            | 120 | User EEPROM     | User writable non-volatile memory |
| 248-255            | 8   | Vendor Control  | Vendor specific control addresses |

● **Block Diagram of Transceiver**

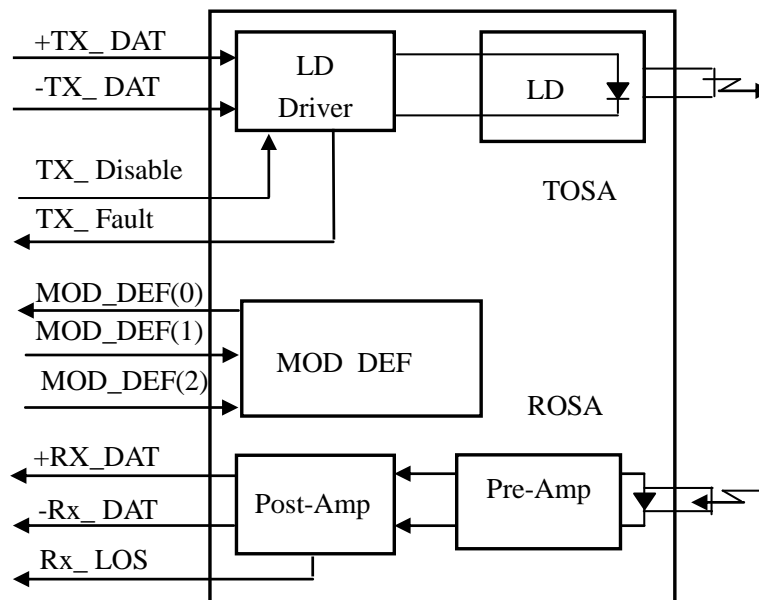


Block Diagram

**Recommended Circuit:**

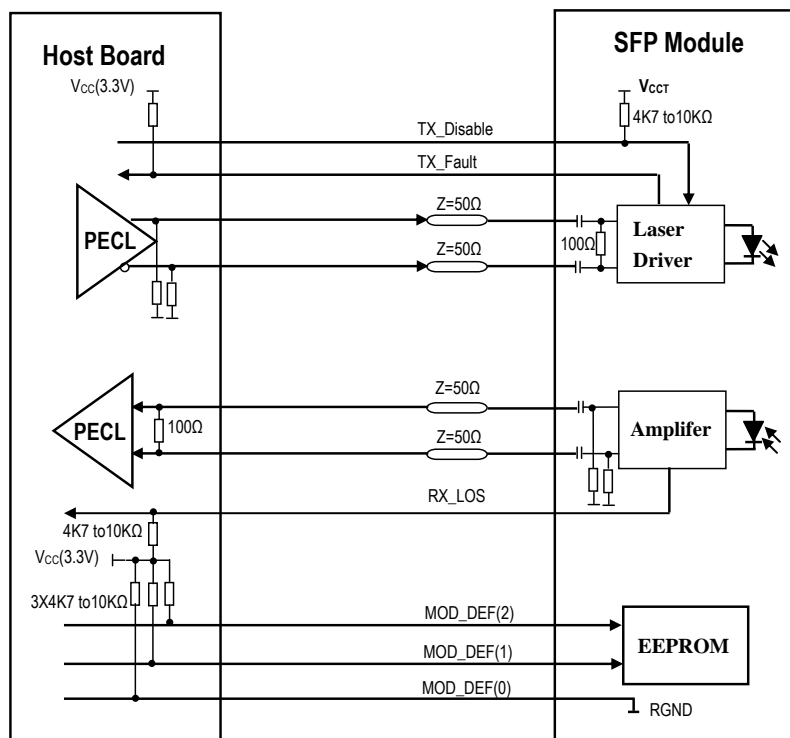

SFP Host Recommended Circuit

**Mechanical Dimensions:**

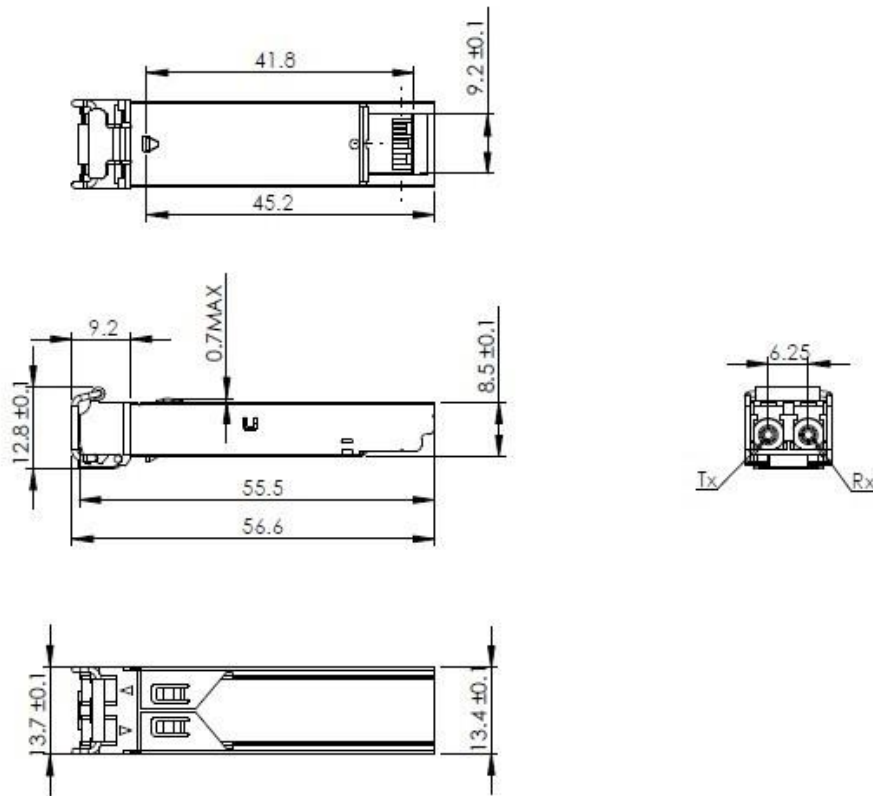

Mechanical Drawing

OPWAY reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information.

Published by Shenzhen OPWAY Communication Co., Ltd.

Copyright © OPWAY

All Rights Reserved